TORO

Stand-alone Sign & Label system

Battery and AC
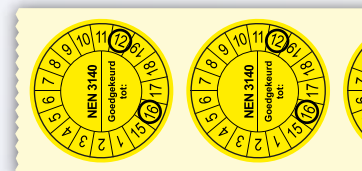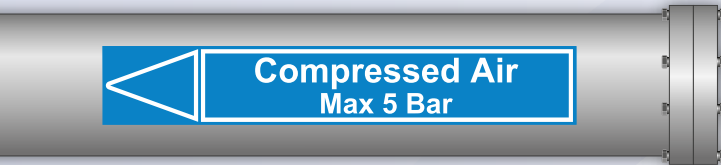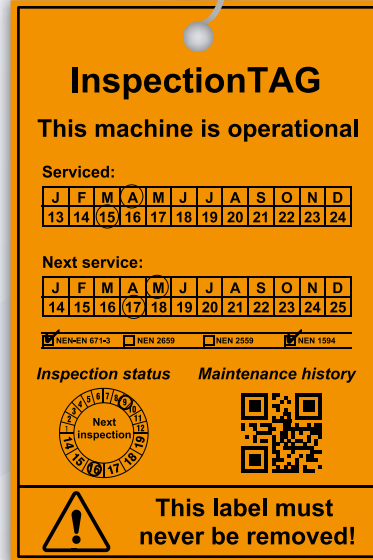
IT Independent

Industrial Quality

**Six Sigma and LEAN | Safety instructions | Barcodes
GHS marking | Machine ID | Maintenance Tags
Inspection labels | Warehouse labels | Pipe marking**

TORO - Any time, anywhere!

The TORO is a unique revolution in Industrial sign and labeling solutions. Fully independent, operating with both battery and mains power and its own integrated operating system - the TORO goes anywhere and delivers so much. With a full colour, 9 inch touch screen, wireless mouse, full size keyboard and pre-installed design software, PDF reader, spreadsheet program and audio video software – the TORO is unbeatable in value for money and in delivering multiple sign and labeling solutions from one 'stand alone' system.

TORO

With the TORO you can easily create all of the labels below!

Firehose

ATTENTION
ESD PROTECTED AREA
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
SENSITIVE
DEVICES

2B 12 2   2B 12 3   2B 12 4

EMERGENCY EXIT
Turn service lock a full 360 degrees to de-activate door seals!
Call 099 455 366

④ 2B
③ 2B-12-3
② 2B
① 2B-12-1

InspectionTAG

This machine is operational

Serviced:

J	F	M	A	M	J	J	A	S	O	N	D
13	14	15	16	17	18	19	20	21	22	23	24

Next service:

J	F	M	A	M	J	J	A	S	O	N	D
14	15	16	17	18	19	20	21	22	23	24	25

☑ NEN-EN 671-3   ☐ NEN 2659   ☐ NEN 2559   ☑ NEN 1594

Inspection status   *Maintenance history*

Next
Inspection

**This label must
never be removed!**

Wire-Wrap
00026

Wire-Wrap
00028

Compressed Air
Max 5 Bar

6000 daN (Kg)

Lashings, 30° minimum

Rebo   www.rebosystems.com   + 31 (0)35- 60 169 41

Propane
Feeds line 14/08

**WASHING
HANDS
REQUIRED!**

NEN 3140
Goedgekeurd
tot:

NEN 3140
Goedgekeurd
tot:

STANDARD TAPE QUALITIES:

- ■ **Industrial Vinyl (E300)** - Standard 3-5 year, perfect for most applications.

- ● **Premium Vinyl (ST700)** - High quality 5-7 year, for higher durability.

- ★ **High-Tack (HT700)** - High tack adhesive, ideal for difficult surfaces like wood, concrete, oil and low friction plastics.

- ▬ **Polyester (PT700)** - High tack adhesive, high temperature, low halide - ideal for machine plates and pipes.

- 🔥 **High Temperature Tape (H250)** - High tack adhesive and extra high temperature resistance.

TORO

FIRE HOSE REEL

CE ⓊⓁ ⓊⓁ
Listing L.T.E.
901 IJ
E176128
Modelnr.: SMS
100-240 VOLT 50/60 Hz, 2A
Serienummer: 21220009
21220009

S-12-4
S-12-2

Order Nr:	S-03114587	Pos Nr:	T23-A12	*SMS*
Type:	SMS	Pstat Nr:	1250 M3/s	
Air quant:	1250 M3/s	Voltage:	380 V	CE
Motor:	7.5 KW	Code Nr:	PFT-679025	

P

08. Categorie: Inspection and maintenance
Material: ST-700 Premium Vinyl
Rebo Sign & Label system
Tel. 0031 35-6016941 www.rebosystems.com
Rebo systems

☑ NEN-EN 671-3 ☐ NEN 2659 ☐ NEN 2559 ☑ NEN 1594

Yearly maintenance inspection

☐ Failed
☐ Referred
☑ Passed

Maintenance date
J	F	M	A	M	J	J	A	S	O	N	D
13	14	15	16	17	18	19	20	21	22	23	24

First maintenance interval
1	2	3	4	5	6	7	8	9
10	20	30	40	50	60	70	80	90
100	200	300	400					

J	F	M	A	M	J	J	A	S	O	N	D
14	15	16	17	18	19	20	21	22	23	24	25

06. Categorie: Air Conditioning
Material: HT-700 HighTack Vinyl

Rebo systems
Rebo b.v. Sign & Label systemen
Beckeringhstraat 21
3762 EV Soest
Tel. 0031 35-6016941
www.rebosystems.com

CE ®PED
GeprüfiSound

VanNorm

Installation ID number:	A34
Delivery date	15-12-2011
Type of coolant:	R410A
Weight	950 kg

INSTRUCTIONS   Installation

☐ Connect all HT and LT cables
☐ Pre-charge the pressure vessel.
☐ Run Set Up routine in Service mode.
☐ Turn all power switches to ON

Decommission.
☐ Disconnect all HT and LT power cables
☐ Discharge the Pressure Vessel.
☐ Run Shut Down in Service Mode
☐ Isolate Mains Feed.
☐ Set all power switches to OFF

Installation Data Log

14-08-2015				

Log Book ☐ YES   NO. ☐

**Print custom instruction labels with a
Rebo Sign & Label system**

QC PASSED QC PASSED QC PASSED QC PASSED QC PASSED

☠ **Chromium Acid 5%
02B1-RB-R023B** 🔥

R8, R25, R43, R49, R50/53
Stimulates the ignition of flammable substances
Toxic if swallowed
May cause sensitization by skin contact
May cause cancer by inhalation
Very toxic to aquatic organisms, may cause long-term damaging effects
in the aquatic environment
S45, S53, S60, S61
In case of accident or if you feel unwell, seek medical advice immediately
(show the label where possible)
Avoid exposure - obtain special instructions before use
This material and its container dispose as hazardous waste
Avoid release into the environment. Request special instructions / safety data

NEN 3140 Goedgekeurd tot:

LOTNR.:1251 123456
LOTNR.:1252 123456
LOTNR.:1252 123456

SPECIAL MATERIALS:

Reflective Tape (RT500) - Reflective tape for indoor and outdoor usage.

Fluorescent Tape (FL500) - Fluorescent tape with a very high visibility.

Photoluminescent Tape (RG500) - Glow-in-the-dark tape for signs that need to remain visible after a power cut.

Tags (T100) - Non-adhesive, untearable tags. Available in continuous and die-cut materials.

Wire-Wraps (WI100) - Self laminating, wrap around cable and wire marking.

Metal Detectable Tape - Locatable by a metal detector, ideal for the food industry.

GHS Labels - Pre-printed GHS labels available in several sizes, with choice of max. 4 red diamonds.

For a **FREE sample pack** of our label materials

contact us on info@rebosystems.com or call us on **+31 (0)35 601 6941**

Rebo systems

TORO - For Industrial labeling – 'On the Move'

The TORO is so self-contained, it even has its own instructional and information videos pre-installed. From health and safety signage to data base connected labels, the TORO can deliver both simple and sophisticated solutions. It has over 40 different materials for every application including: high or low temperatures, oily and difficult surfaces, permanent or removable adhesives, mild or aggressive chemical resistance and more...

A dependable system, delivered with top class software!

- Professional software with extensive print & design capabilities
- Easy to use Design Wizards speed up production
- Design and edit texts, barcodes, lines, shapes and images
- Advanced functionality for multiple field linking
- Powerful 'form' designer for standardised layouts with user data entry
- Thousands of industrial symbols and icons in compliance with the latest regulations
- Advanced design tools like rich text, linestyles, group, textframes with automatic font size
- Advanced 'tiling' function for larger signs (NiceLabel Pro)
- Easily import data into your labels from data bases and spread sheets (Excel, Acces)
- Microsoft® certified software

Printer specifications

Printing method	Thermal Transfer
Resolution	300dpi
Speed	Min. 76mm/s (3ips)
Print Length	Max. 762mm
Print Width	Max. 101,6mm
Dimensions	L 260mm x W 342mm x H 223mm
Weight	6,26kg
Memory	1GB SDRAM / 4GB Flash ROM
Operation Interface	1x On/Off button / 4x buttons (Feed, Keyboard release, Screen release, Battery release)
Connectivity	USB-A, USB-B
Agency Listings	RoHS, WEEE
Media Type	Die-cut, Continuous, Tags and Black Mark
Ribbon Type	Resin, Wax/Resin

Visit our comprehensive website to review the large range of material available!
www.rebosystems.com

Rebo B.V.
Beckeringhstraat 21
3762 EV Soest
Netherlands

✆ +31 (0)35 - 601 69 41
@ info@rebosystems.com
🛒 sales@rebo.nl
🌐 www.rebosystems.com